


SECTION A-A

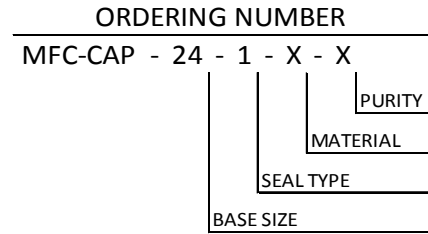

- MATERIAL DESIGNATORS**
- S = 316L SST SEMI F20
  - A = 316L
  - B = 316L SST SEMI F20 VIM/VAR
  - N = NICKEL 200
  - M = NICKEL 400
  - H = NICKEL ALLOY C22

- PURITY DESIGNATORS**
- S = STANDARD FINISH
  - H = HIGH PURITY
  - U = ULTRA-HIGH PURITY

NOTES:  
 1. DRAWINGS FOR SPECIFICATION PURPOSES AND ARE FOR REFERENCE ONLY.  
 2. ALL VERSIONS OF THE DRAWING ARE SUPERSEDED BY THIS RELEASE AND SUBJECT TO CHANGE WITHOUT NOTIFICATION.

EFFECTIVE DATE: 2/6/2017	<p>1003 INDUSTRIAL DRIVE          SAUK RAPIDS, MN 56379          VOICE: 320-251-0390          FAX: 320-251-5810</p>
INTERPRET DRAWING PER: ASME Y14.5 - 2009	
THIRD ANGLE PROJECTION:	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TALON INNOVATIONS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TALON INNOVATIONS, INC. IS PROHIBITED.	DESCRIPTION: <b>MFC FLOW THRU CAP          1.500" C-SEAL</b>
DO NOT SCALE DRAWING	SIZE: <b>C</b>
SCALE: 3:2	PART NUMBER: <b>MFC-CAP-24-1-X-X</b>
	SHEET 1 OF 1